






SPECIFICATIONS

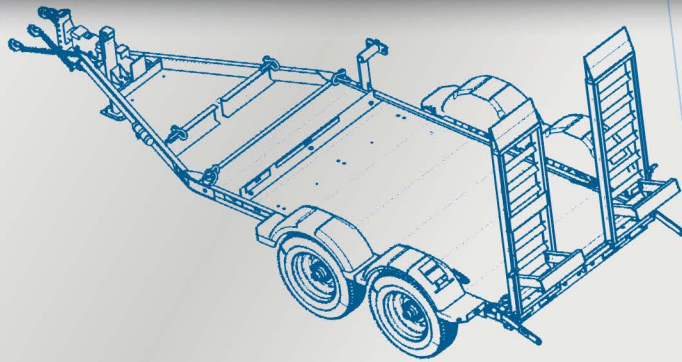

*DRIVING INNOVATION
TOWING EXCELLENCE...*

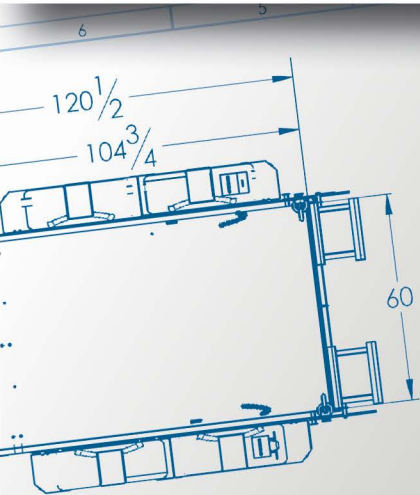

<https://www.ViperTrailers.com/>

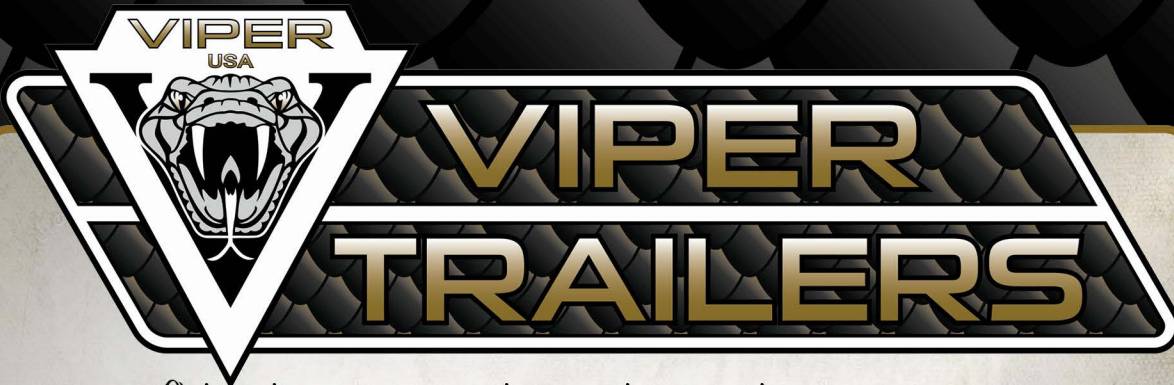

Out on the highways, on the job site, or right in your backyard our trailers get it done.

From our state of the art manufacturing facility in the heart of Indiana, Viper Trailers produces some of the toughest and highest quality trailers on the market today.

Whether it's our innovative EZ Rise drop deck trailers, heavy duty equipment trailers, or our easy to use cargo trailers, Viper Trailers has what you need to load up and get hauling.



V1065

V865 - V RAMP TRAILER

8' x 65" deck surface

Specifications

Capacities

- Max Payload 1,690 lbs.
- GVWR 2,060 lbs.
- Trailer Weight 930 lbs. (Approx.)
- Axle Rating 1 x 3,500 lbs.
- Jack Rating 2,000 lbs.

Dimensions

- Deck Loading Area 8' x 65"
- Overall Length 12'-8"
- Overall Width 7'-6"
- Wheel Size 12"
- Tire Size 5.30-12
- Ball Size 2" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System



Standard Features

- 4" x 4" x 3/16" Structural I-beam Steel Frame
- 2" Structural Angle Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Single Torsion Axle Suspension (No Brakes)
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

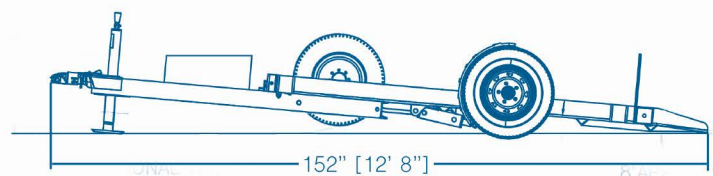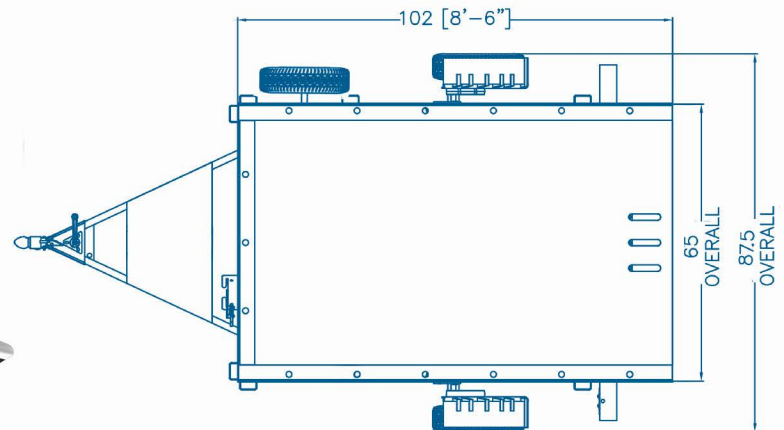

V865HD - V RAMP TRAILER

8' x 65" deck surface

Specifications

Capacities

- Max Payload 4,380 lbs.
- GVWR 5,720 lbs.
- Trailer Weight 1,340 lbs. (Approx.)
- Axle Rating 1 x 5,200 lbs.
- Jack Rating 2,000 lbs.

Dimensions

- Deck Loading Area 8' x 65"
- Overall Length 13'
- Overall Width 7'-6"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System



Standard Features

- 5" x 5" x 5/16" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Single Torsion Axle Suspension
- Electric Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

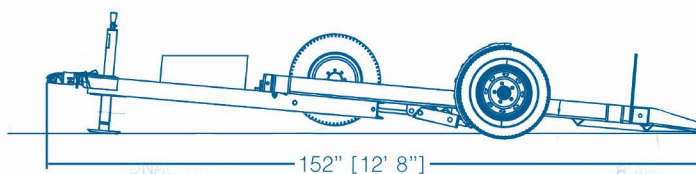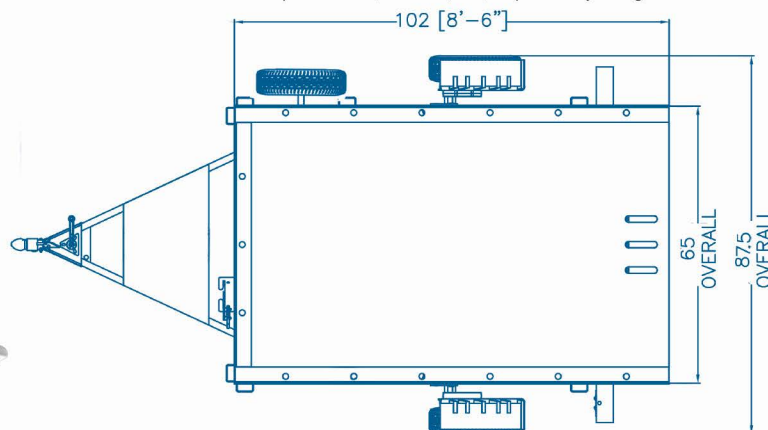

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

V1065 - V RAMPTRAILER

10' x 65" deck surface

Specifications

Capacities

- Max Payload 4,240 lbs.
- GVWR 5,720 lbs.
- Trailer Weight 1,340 lbs. (Approx.)
- Axle Rating 1 x 5,200 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 10' x 65"
- Overall Length 15'
- Overall Width 7'-6"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Standard Features

- 5" x 5" x 5/16" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Single Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- Marker Pole Kit
- Aluminum Wheels

**Specifications, materials, and/or options may change without notice.*

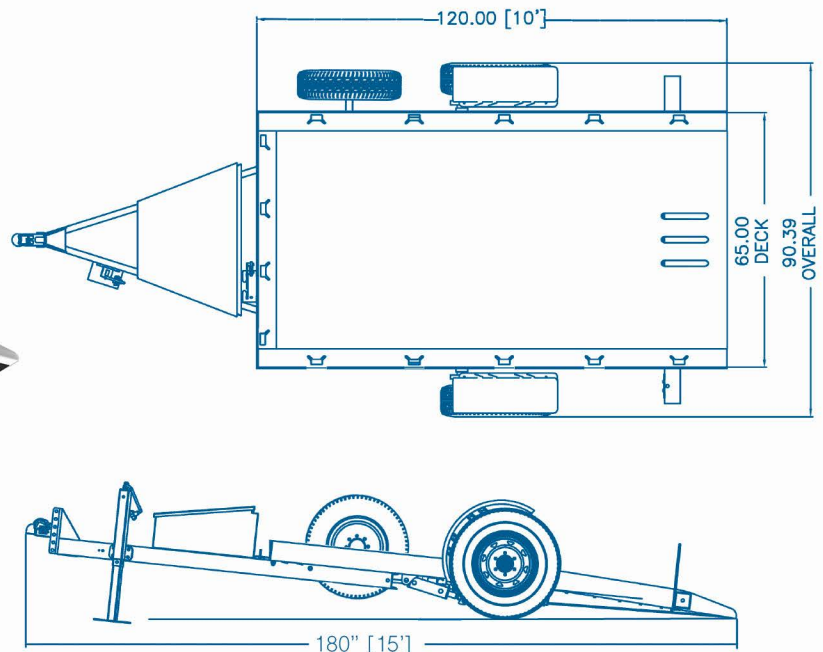

V1265 - V RAMP TRAILER

12' x 65" deck surface

Specifications

Capacities

- Max Payload 6,060 lbs.
- GVWR 7,700 lbs.
- Trailer Weight 1,640 lbs. (Approx.)
- Axle Rating 1 x 7,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 12' x 65"
- Overall Length 17'
- Overall Width 7'-6"
- Wheel Size 16"
- Tire Size ST235/80R16D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System



Standard Features

- 5" x 5" x 5/16" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10ga. Steel Decking with Full Length Anti-skid Surface
- Single Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- Marker Pole Kit
- Aluminum Wheels

**Specifications, materials, and/or options may change without notice.*

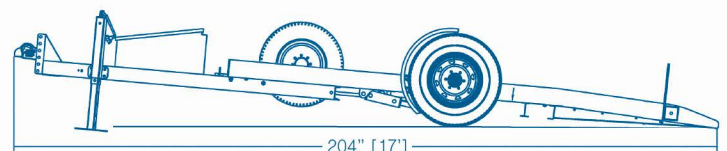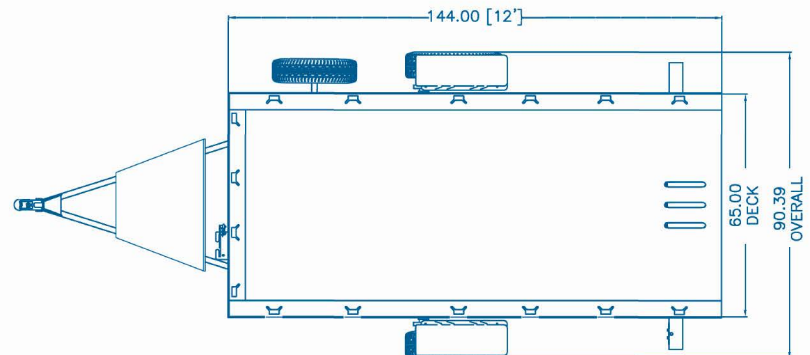

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

V1265T - V RAMP TRAILER

12' x 65" deck surface

Specifications

Capacities

- Max Payload 8,440 lbs.
- GVWR 11,440 lbs.
- Trailer Weight 2,500 lbs. (Approx.)
- Axle Rating 2 x 5,200 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 12' x 65"
- Overall Length 17'
- Overall Width 7'-6"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System



Standard Features

- 5" x 5" x 5/16" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Twin Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- Marker Pole Kit
- Aluminum Wheels

**Specifications, materials, and/or options may change without notice.*

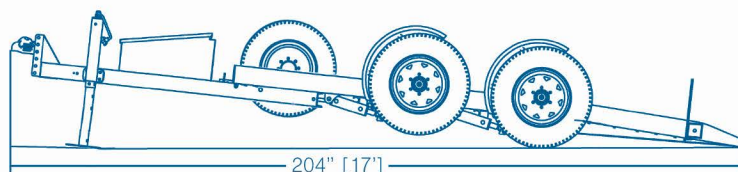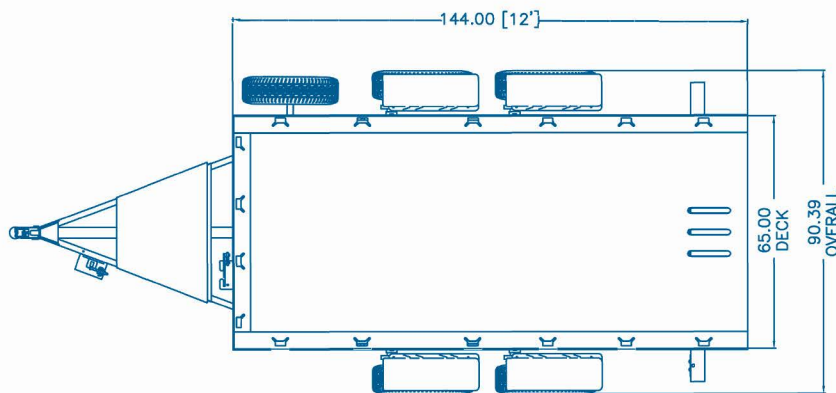

V1480 - V RAMP TRAILER

14' x 80" deck surface

Specifications

Capacities

- Max Payload 12,650 lbs.
- GVWR 15,400 lbs.
- Trailer Weight 2,750 lbs. (Approx.)
- Axle Rating 2 x 7,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 14'-9" x 80"
- Overall Length 20'
- Overall Width 8'-6"
- Wheel Size 16"
- Tire Size ST235/80R16D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Standard Features

- 6" x 6" x 3/8" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Twin Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- 3" I.D. Pintle Coupler
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

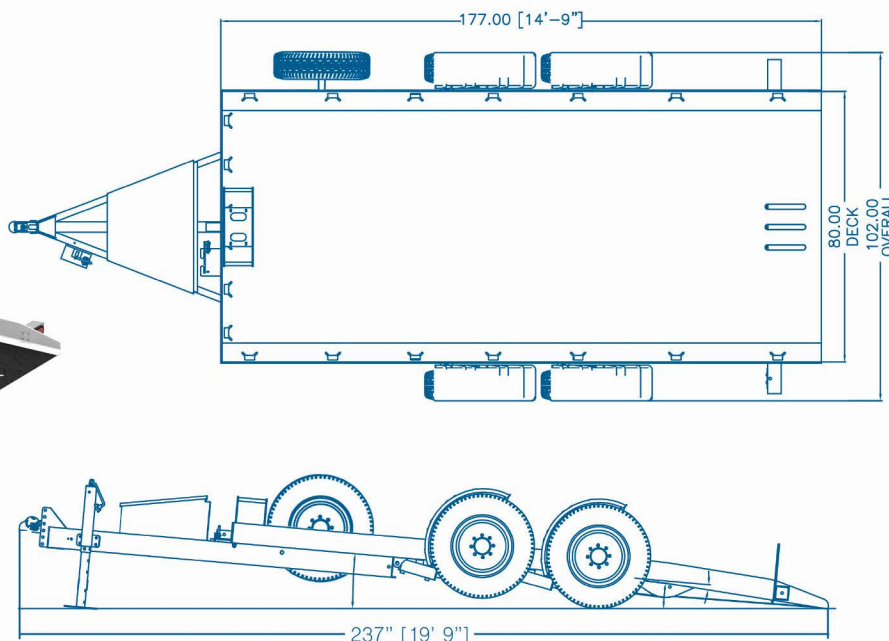

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

V1680 - V RAMP TRAILER

16' x 80" deck surface

Specifications

Capacities

- Max Payload 12,300 lbs.
- GVWR 15,400 lbs.
- Trailer Weight 3,100 lbs. (Approx.)
- Axle Rating 2 x 7,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 16' x 80"
- Overall Length 22'
- Overall Width 8'-6"
- Wheel Size 16"
- Tire Size ST235/80R16D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Standard Features

- 6" x 6" x 3/8" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Twin Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- 3" I.D. Pintle Coupler
- Marker Pole Kit
- Aluminum Wheels

**Specifications, materials, and/or options may change without notice.*

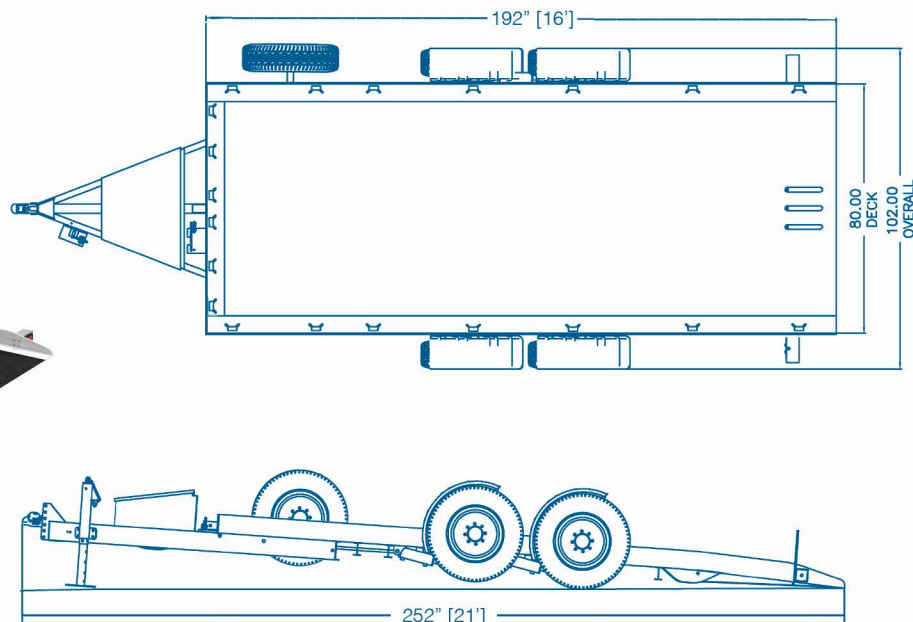

V1980 - V RAMP TRAILER

19' x 80" deck surface

Specifications

Capacities

- Max Payload 12,700 lbs.
- GVWR 15,400 lbs.
- Trailer Weight 3,300 lbs. (Approx.)
- Axle Rating 2 x 7,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 19' x 80"
- Overall Length 24'
- Overall Width 8'-6"
- Wheel Size 16"
- Tire Size ST235/80R16D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Standard Features

- 6" x 6" x 3/8" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Twin Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- 3" I.D. Pintle Coupler
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

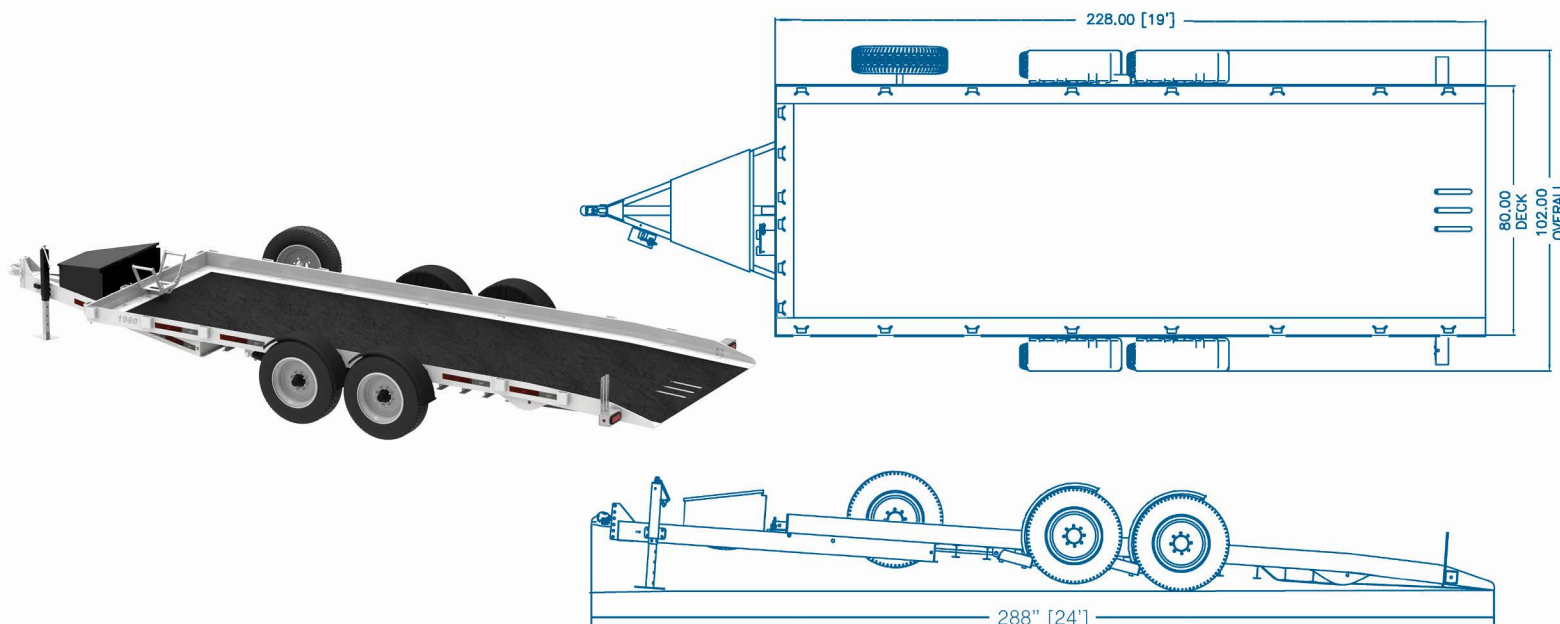

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

V2280 - V RAMP TRAILER

22' x 80" deck surface

Specifications

Capacities

- Max Payload 12,700 lbs.
- GVWR 15,400 lbs.
- Trailer Weight 3,640 lbs. (Approx.)
- Axle Rating 2 x 7,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 19' x 80"
- Overall Length 27'
- Overall Width 8'-6"
- Wheel Size 16"
- Tire Size ST235/80R16D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Standard Features

- 6" x 6" x 3/8" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 10 Gauge Steel Decking with Full Length Anti-skid Surface
- Twin Torsion Axle Suspension
- Electric or Surge Drum Brakes
- Integrated Safety Chain Holders
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- D-Rings
- 3" I.D. Pintle Coupler
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

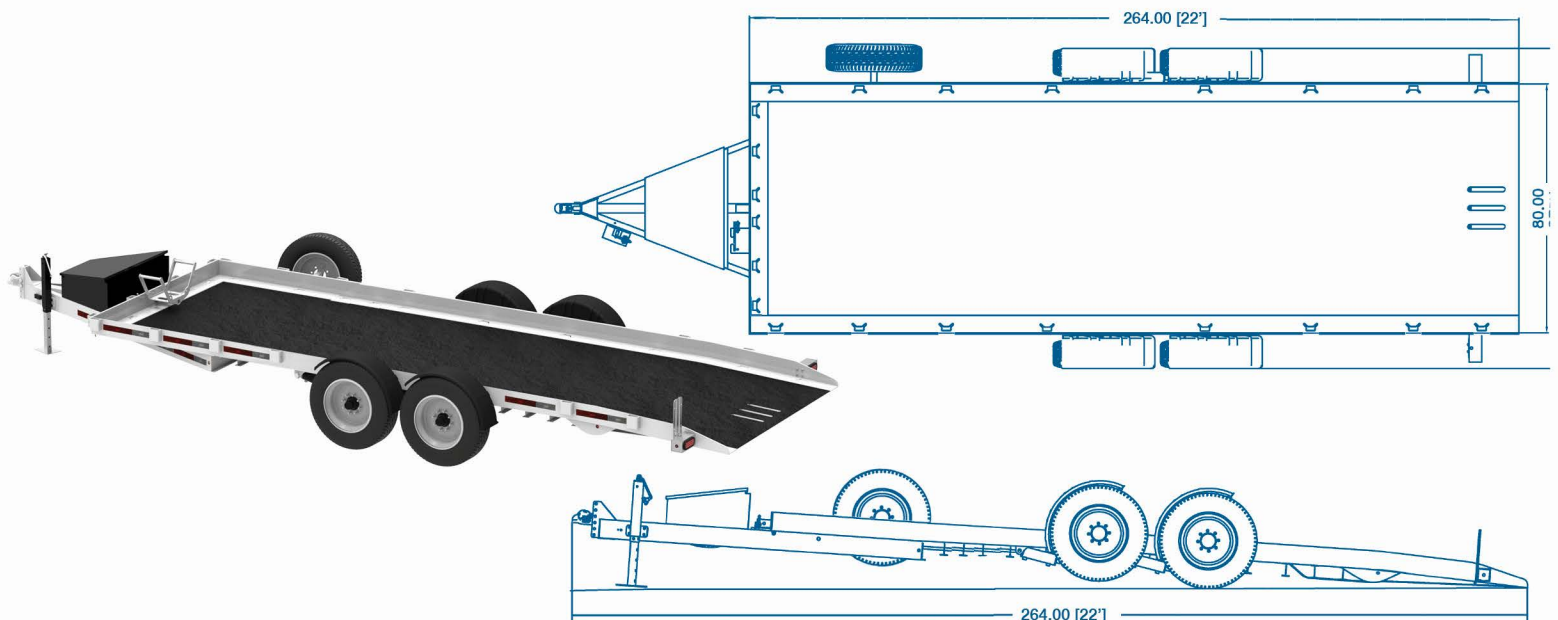

V2480 - V RAMP TRAILER

24' x 80" deck surface

Specifications

Capacities

- Max Payload 18,100 lbs.
- GVWR 23,100 lbs.
- Trailer Weight 5,000 lbs. (Approx.)
- Axle Rating 3 x 7,000 lbs.
- Jack Rating 12,000 lbs.

Dimensions

- Deck Loading Area 24' x 80"
- Overall Length 29'
- Overall Width 8'-6"
- Wheel Size 17-1/2"
- Tire Size ST215/75R17.5D
- Ball Size 2-5/16" Adj. Ball

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Chassis & Suspension

- 8" x 6" x 1/2" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 3/16" Steel Decking with Full Length Anti-skid Surface
- Triple Torsion Axle Suspension
- Electric Drum Brakes
- 18 D-Rings
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- 3" I.D. Pintle Coupler
- Marker Pole Kit
- Aluminum Wheels

*Specifications, materials, and/or options may change without notice.

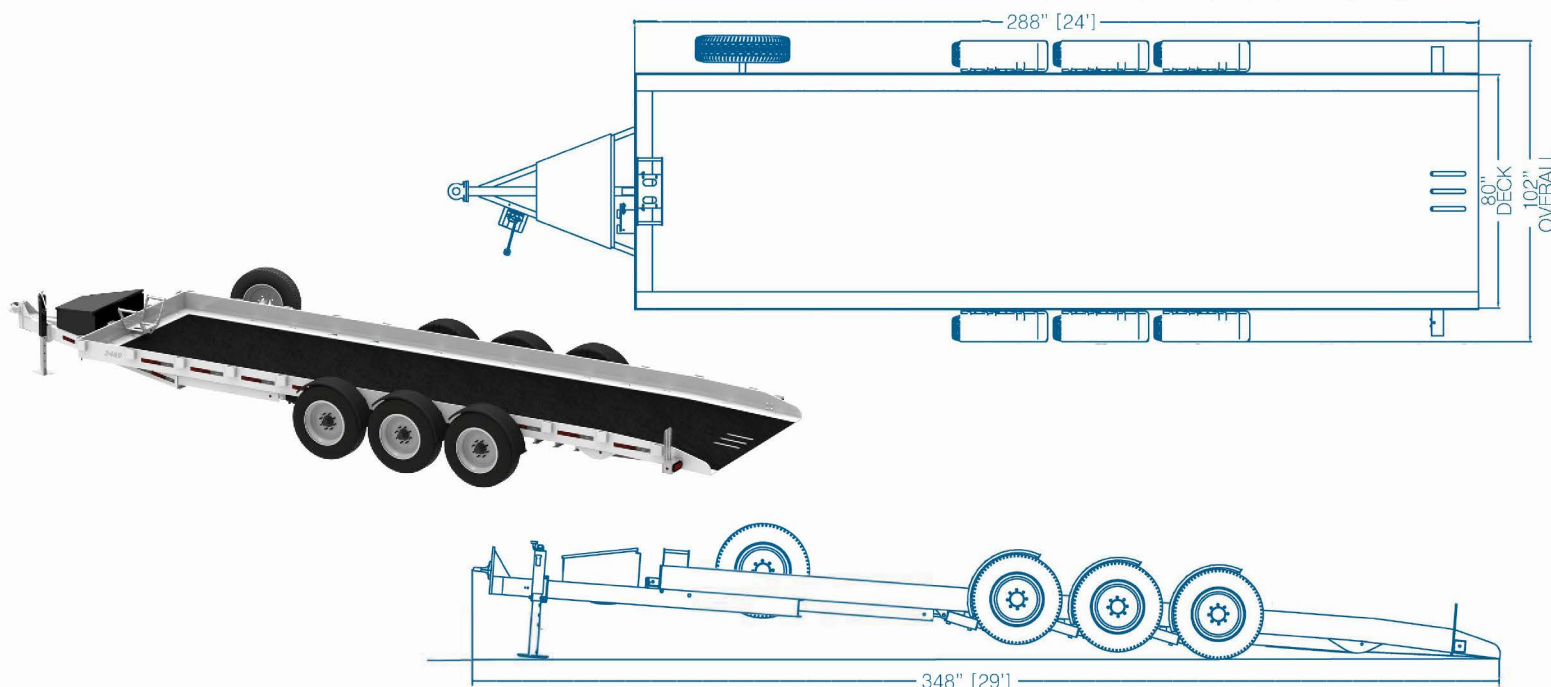

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

V2480GN - V RAMP TRAILER

24' x 80" deck surface

Specifications

Capacities

- Max Payload 18,100 lbs.
- GVWR 24,150 lbs.
- Trailer Weight 6,050 lbs. (Approx.)
- Axle Rating 3 x 7,000 lbs.
- Jack Rating 2 x 12,000 lbs.

Dimensions

- Deck Loading Area 24' x 80"
- Overall Length 33'
- Overall Width 8'-6"
- Wheel Size 17-1/2"
- Tire Size ST215/75R17.5D
- Ball Size 2-5/16" Gooseneck

Electrical

- LED Rubber Mounted Lighting
- Factory Molded Wiring Harness
- Group 27 Battery
- Electric Assist Hydraulic Lift System


Chassis & Suspension

- 8" x 6" x 1/2" Structural Steel Frame
- 4" HSS I-Beam Crossmembers
- 3/16" Steel Decking with Full Length Anti-skid Surface
- Triple Torsion Axle Suspension
- Electric Drum Brakes
- 18 D-Rings
- Stake Pockets with Rub Rail

Options

- Wireless Remote Control
- 8 Amp On-Board Battery Charger
- Solar Trickle Charger
- Spare Tire Carrier & Wheel Assembly
- Winch Kit
- Marker Pole Kit
- Aluminum Wheels

**Specifications, materials, and/or options may change without notice.*

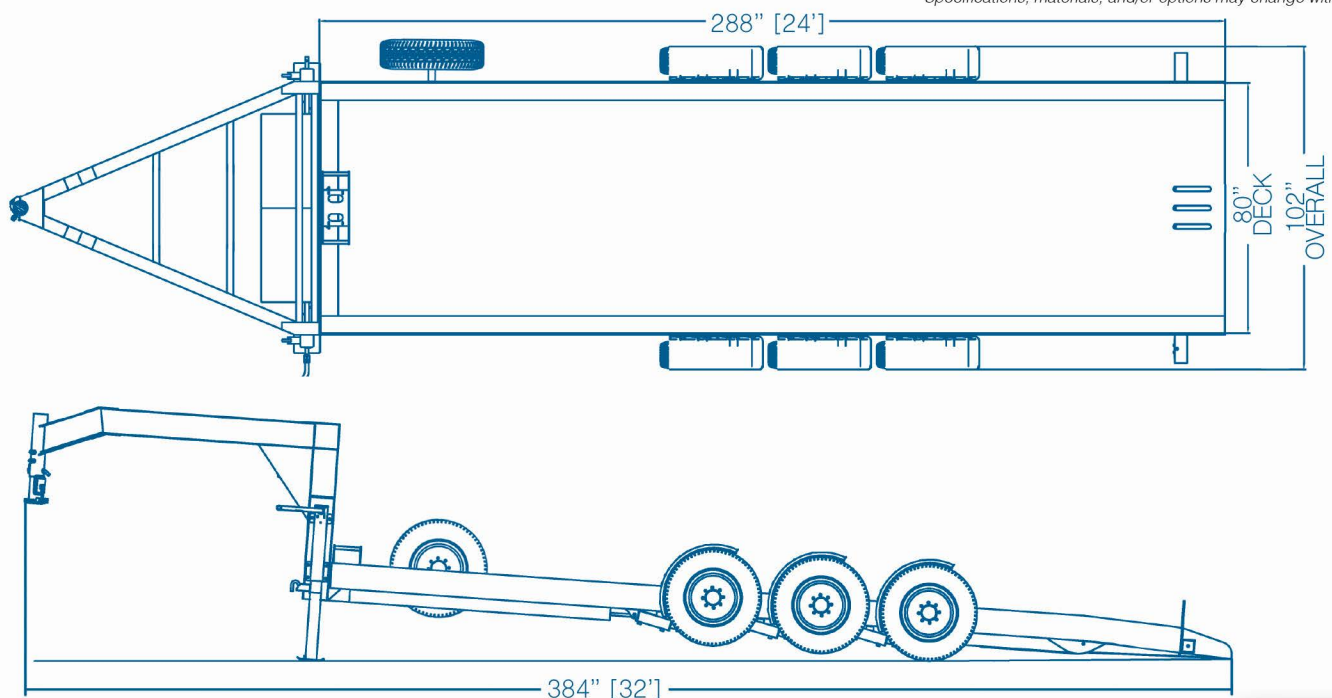

VPO407 - COMPACT EQUIPMENT TRAILERS

4' x 7' deck surface

Specifications

Capacities

- Max Payload 4,870 lbs.
- GVWR 6,000 lbs.
- Trailer Weight 1,130 lbs. (Approx.)
- Axle Rating 1 x 6,000 lbs.
- Jack Rating 2,000 lbs.

Dimensions

- Deck Loading Area 4' x 7'
- Overall Length 14'-5"
- Overall Width 6'-4"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2" Ball

Electrical


- DOT Compliant LED Lighting
- Factory Molded Wiring Harness

Standard Features

- 3" Steel C-Channel Frame
- 1/8" Steel Tread Plate
- Single Spring Axle
- Hydraulic Drum Brakes
- Powder Coat Paint
- Integrated D-Ring Tie Downs
- Tool Holder Insert
- Manifest & Registration Holder

Options

- Spare Tire Carrier & Wheel Assembly
- Multi-position Load Stop Bar
- Coupler Lock
- Wheel Lock

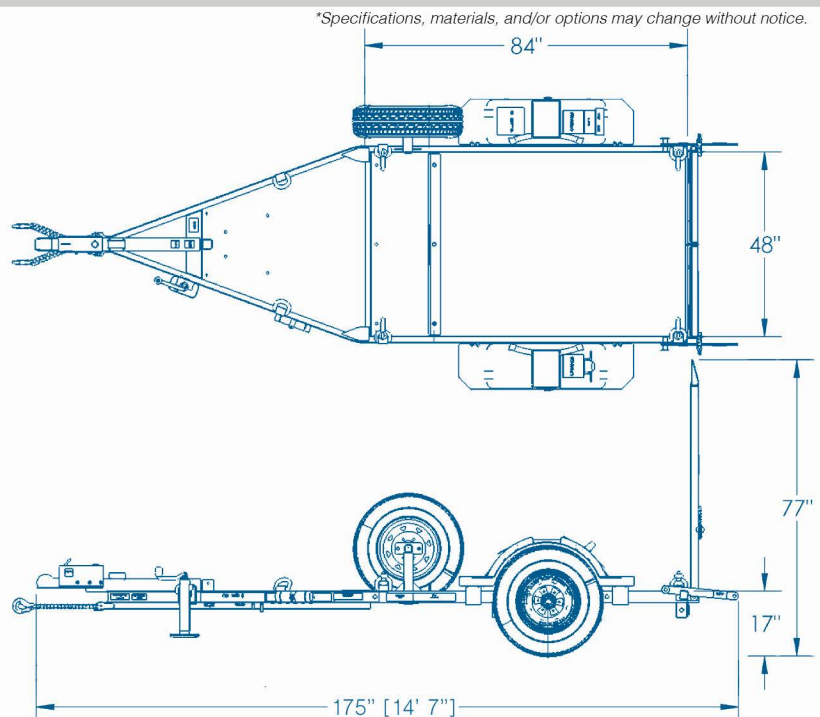

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

VP0510 - COMPACT EQUIPMENT TRAILERS

5' x 10' deck surface

Specifications

Capacities

- Max Payload 8,430 lbs.
- GVWR 10,400 lbs.
- Trailer Weight 1,970 lbs. (Approx.)
- Axle Rating 2 x 5,200 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 5' x 10'
- Overall Length 16'-5"
- Overall Width 7'-4"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2" Adj. Ball

Electrical

- DOT Compliant LED Lighting
- Factory Molded Wiring Harness


Standard Features

- 4" Steel C-Channel Frame
- 1/8" Steel Tread Plate
- Tandem Torsion Axles
- Hydraulic Drum Brakes
- Powder Coat Paint
- Integrated D-Ring Tie Downs
- Spring Assisted Ramps
- Drop Leg Jack
- Manifest & Registration Holder

Options

- Spare Tire Carrier & Wheel Assembly
- Multi-position Load Stop Bar
- Coupler Lock
- Wheel Lock

**Specifications, materials, and/or options may change without notice.*

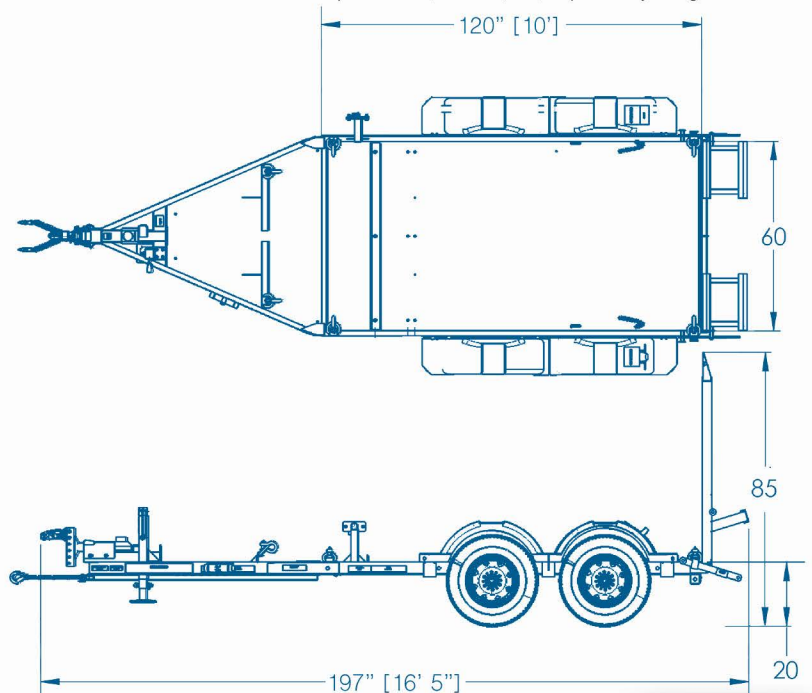

VP0614 - COMPACT EQUIPMENT TRAILERS

6' x 14' deck surface

Specifications

Capacities

- Max Payload 9,550 lbs.
- GVWR 12,000 lbs.
- Trailer Weight 2,450 lbs. (Approx.)
- Axle Rating 2 x 6,000 lbs.
- Jack Rating 7,000 lbs.

Dimensions

- Deck Loading Area 6' x 14'
- Overall Length 21'
- Overall Width 8'-4"
- Wheel Size 15"
- Tire Size ST225/75R15D
- Ball Size 2-5/16" Adj. Ball

Electrical

- DOT Compliant LED Lighting
- Factory Molded Wiring Harness



Standard Features

- 6" Steel C-Channel Frame
- 1/8" Steel Tread Plate
- Tandem Torsion Axles
- Hydraulic Drum Brakes
- Powder Coat Paint
- Integrated D-Ring Tie Downs
- Spring Assisted Ramps
- Drop Leg Jack
- Manifest & Registration Holder

Options

- Spare Tire Carrier & Wheel Assembly
- Multi-position Load Stop Bar
- Coupler Lock
- Wheel Lock

**Specifications, materials, and/or options may change without notice.*

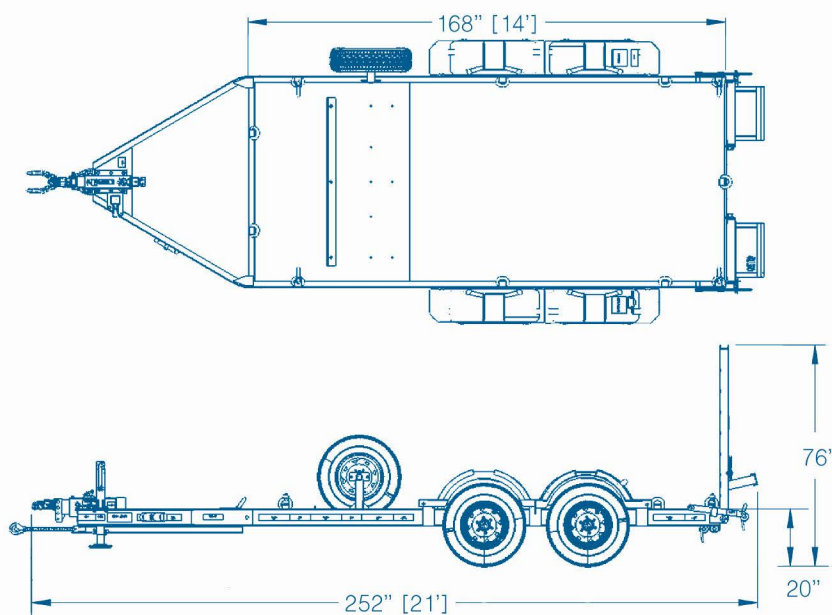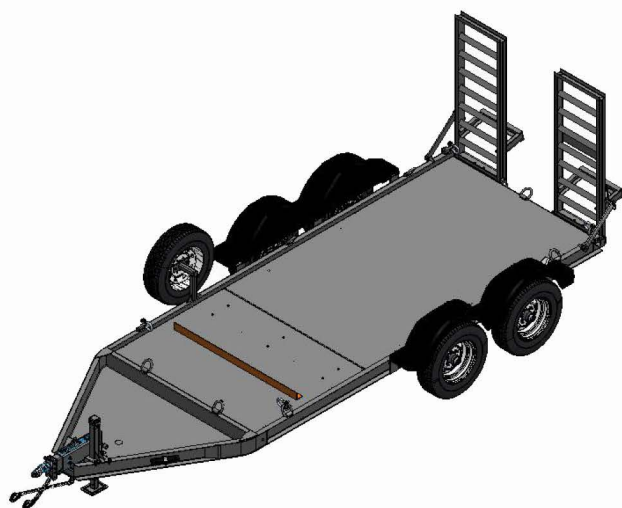

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211

VU-CF - COMPACT UTILITY TRAILERS

64" x 98" deck surface

Specifications

Capacities

- Max Payload 1,890 lbs.
- GVWR 2,990 lbs.
- Trailer Weight 1,100 lbs. (Approx.)
- Axle Rating 1 x 3,500 lbs.
- Jack Rating 2,000 lbs.

Dimensions

- Deck Loading Area 64" x 98"
- Overall Length 13'
- Overall Width 7'
- Load Height 21"
- Wheel Size 15"
- Tire Size ST205/75R15D
- Ball Size 2" Ball

Electrical



- DOT Compliant LED Lighting
- Factory Molded Wiring Harness

Standard Features

- 4" x 2" x 11 Gauge Tube Steel Frame
- 2" x 2" x 11 Gauge Tube Crossmembers
- 2" x 8" Treated Wood Decking
- 14 Gauge Steel Sidewalls
- 24" Sidewalls
- Single Spring Axle (No Brakes)
- Built In Recessed D-Rings

Options

- Coupler Lock
- Wheel Lock
- Spare Tire Carrier & Wheel Assembly

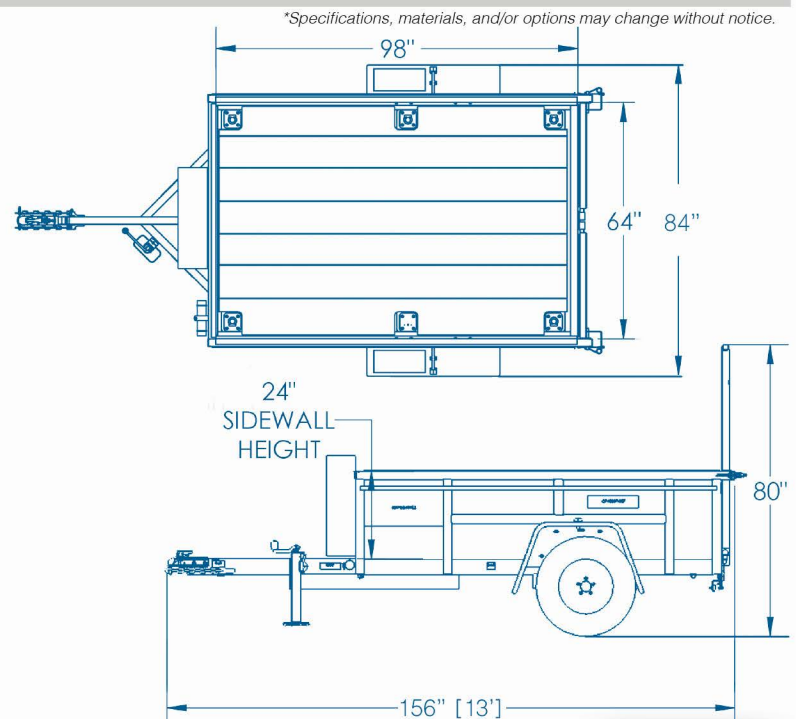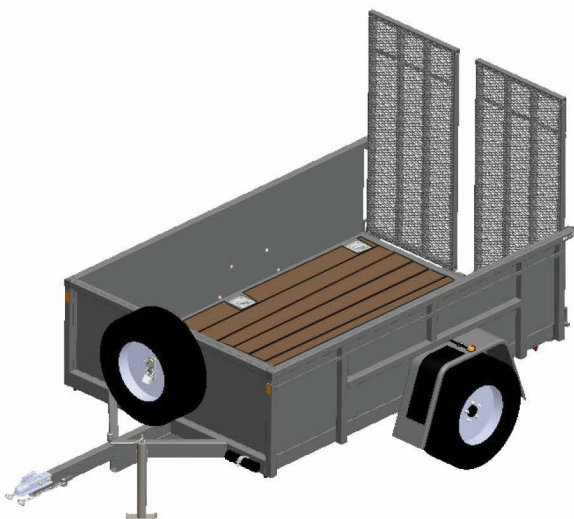

VU-SW - COMPACT UTILITY TRAILERS

64" x 98" deck surface

Specifications

Capacities

- Max Payload 1,790 lbs.
- GVWR 2,990 lbs.
- Trailer Weight 1,200 lbs. (Approx.)
- Axle Rating 1 x 3,500 lbs.
- Jack Rating 2,000 lbs.

Dimensions

- Deck Loading Area 64" x 98"
- Overall Length 13'
- Overall Width 7'
- Load Height 21"
- Wheel Size 15"
- Tire Size ST205/75R15D
- Ball Size 2" Ball

Electrical



- DOT Compliant LED Lighting
- Factory Molded Wiring Harness

Standard Features

- 4" x 2" x 11 Gauge Tube Steel Frame
- 2" x 2" x 11 Gauge Tube Crossmembers
- 1/8" Steel Tread Plate Deck
- 14 Gauge Steel Sidewalls
- 24" Sidewalls
- Single Spring Axle (No Brakes)
- Built In Recessed D-Rings

Options

- Coupler Lock
- Wheel Lock
- Spare Tire Carrier & Wheel Assembly

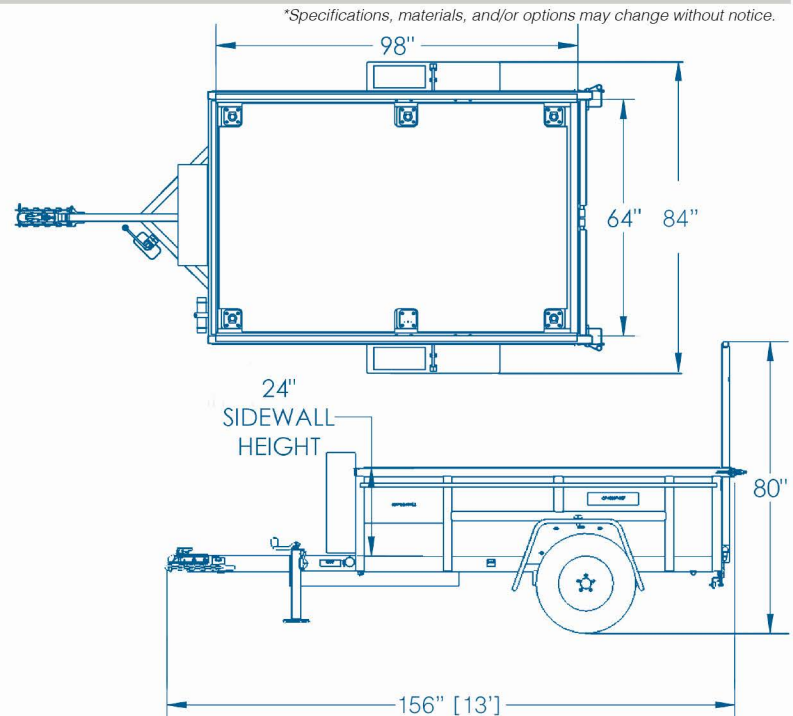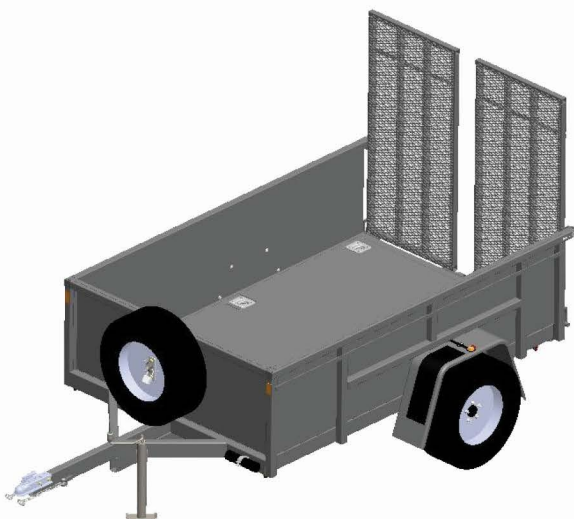

Viper Trailers
345 Burnetts Rd.
West Lafayette, IN 47906

sales@ViperTrailers.com
phone : 765.429.6200
fax : 765.742.4211



Viper Trailers

345 Burnetts Rd.
West Lafayette, IN 47906

p : 765.429.6200

f : 765.742.4211

e : *sales@ViperTrailers.com*



©Viper Trailers. All images and specifications contained in this brochure are based on the latest product information available at the time of publication. Specifications, standard features, options, components, and colors are subject to change without notice. Some features may be subject to availability, delays, or discontinuance. Trailers may be shown with optional equipment. Viper Trailers reserves the right to make changes in features and specifications at any time without notice. Please contact your authorized Viper Trailers dealer for details.

Viper Trailers is proudly

Certified

WBE

Women's Business Enterprise